


SCHATTELLO eccentric		3.0 x 3.0 m	2.0 x 4.0 m	3.0 x 4.0 m
<b>X</b>	Distance from centre pole to outer edge of canopy	cm	70	100
	Segments	8	5	8
	Area	m <sup>2</sup>	8	12
<b>A</b>	Height closed incl. top plate	cm	370	410
<b>B</b>	Height opened incl. top plate	cm	293	300
<b>C</b>	Headroom with valance	cm	212	212
<b>D</b>	Headroom without valance	cm	237	237
<b>F</b>	Ground clearance from spoke edge	cm	144	118
<b>G</b>	Height of lower disc flange	cm	250	263
<b>J</b>		cm	193	197
<b>K</b>		cm	232	192
<b>L</b>		cm	213	175
<b>M</b>		cm	288	293
	Weight without packaging MayTex-ACRYL without valance	kg	37	36
	Support pole diameter	mm	outer-Ø 76, pole thickness 3	
	Packaging cardboard sleeve: length, 444 cm		Ø 33 cm approx. 17 kg	
	Installation base length/width/min. depth	cm	50 / 50 / 60	
	Minimum-ballast Number of layers of concrete slabs X250 required		2 x = approx. 224 kg	

The heights specified are for parasols with MayTex-Acrylic covering fabric that are mounted in an anchor tube SZ150. The increase in height for eccentric parasols with other installation bases can be seen in the list below:

- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ412 + 12 cm
- Anchor plate: SZ131 + 1.5 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ275 + 4 cm


Dimensional tolerance approx. ±5%



**SZ150 with alignment possibility + special clamp**

**Alignment possibility + special clamp**

It is only possible to use such installation bases for SCHATTELLO parasols that have a locking hinge or a full-frame pedestal, adjustable for slanting surfaces. Anchoring bases with locking hinge are installed with setscrews and a special surface clamp. This ensures that the eccentric parasol will be aligned and mounted completely upright.

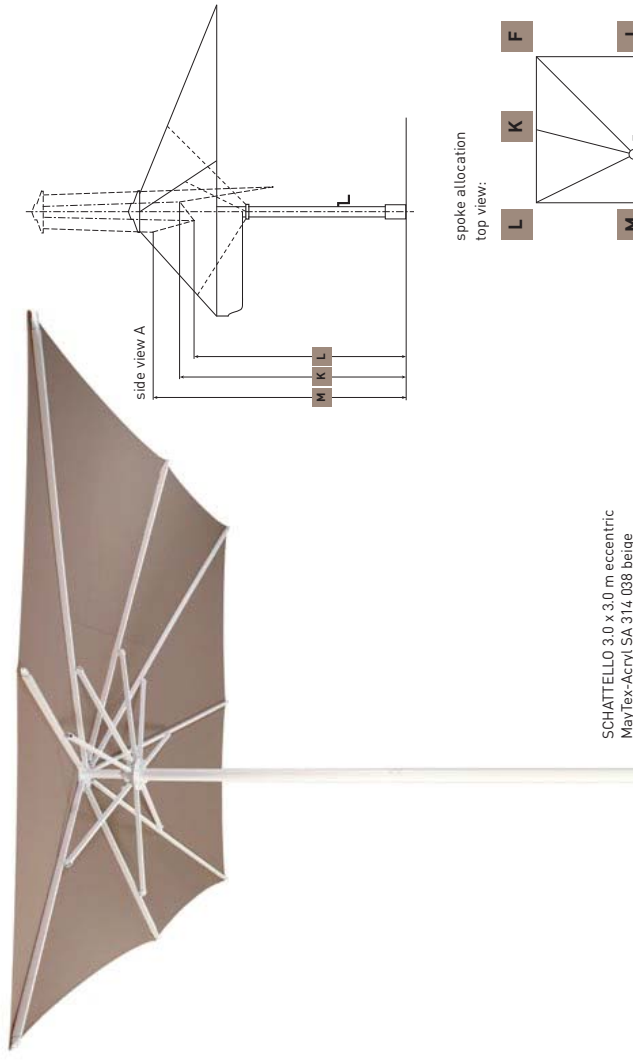

SCHATTELLO 3.0 x 3.0 m eccentric  
MayTex-Acrylic SA 314 038 beige

